

NOTES

- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ARCHITECTURAL AND ENGINEERING DRAWINGS. ANY DISCREPANCIES, ERRORS OR OMISSIONS TO BE BROUGHT TO THE ATTENTION OF THE DESIGNER.
- ALL DIMENSIONS TO BE CHECKED BY THE CONTRACTOR ON SITE PRIOR TO COMMENCEMENT OF WORKS.
- AECOM LIMITED TO BE INFORMED BY THE CONTRACTOR OF ANY DISCREPANCIES PRIOR TO THE COMMENCEMENT OF WORKS ON SITE.
- DIMENSIONS OF ALL BOUNDARIES AND ADJOINING ROADS TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF WORKS.
- ALL SERVICES LOCATIONS HAVE BEEN TAKEN FROM RECORDS AND ARE INDICATIVE. GPR UTILITY SURVEY IS REQUIRED TO CONFIRM LOCATION OF ALL SERVICES.

LEGEND

- PROPOSED PERMEABLE PAVING
- PROPOSED BLOCK PAVING
- PROPOSED POROUS ASPHALT
- PROPOSED LANDSCAPING
- PROPOSED PRIVACY PAVING
- PROPOSED GREEN ROOF
- PROPOSED SELF-BINDING GRAVEL
- PROPOSED CONCRETE COURTYARD
- PROPOSED PERMEABLE RESIN SAFETY SURFACING
- PROPOSED BIORETENTION RAINGARDEN
- PROPOSED RED LINE BOUNDARY
- PROPOSED BLUE ROOF OUTLINE
- PROPOSED CONCRETE WITH RE-PURPOSED MATERIAL
- PROPOSED CONCRETE SURFACING
- PROPOSED TACTILE PAVING



ISSUE/REVISION

NO	DATE	DESCRIPTION
6	08.08.2025	FINAL PLANNING ISSUE
5	20.03.2025	ISSUED FOR PLANNING
4	29.01.2025	ISSUED FOR PLANNING
3	14.01.2025	ISSUED FOR PLANNING
2	24.06.2024	STAGE 2A ISSUE
1	24.05.2024	ISSUED FOR COSTING
0	17.05.2024	ISSUED FOR COSTING
I/R	DATE	DESCRIPTION

PROJECT NUMBER

60719103

SUITABILITY STATUS


S4 - ISSUED FOR PLANNING

SHEET TITLE

PROPOSED PAVEMENT AND SUDS LAYOUT

SHEET NUMBER

60719103-ACM-XX-00-DR-CE-10-0550

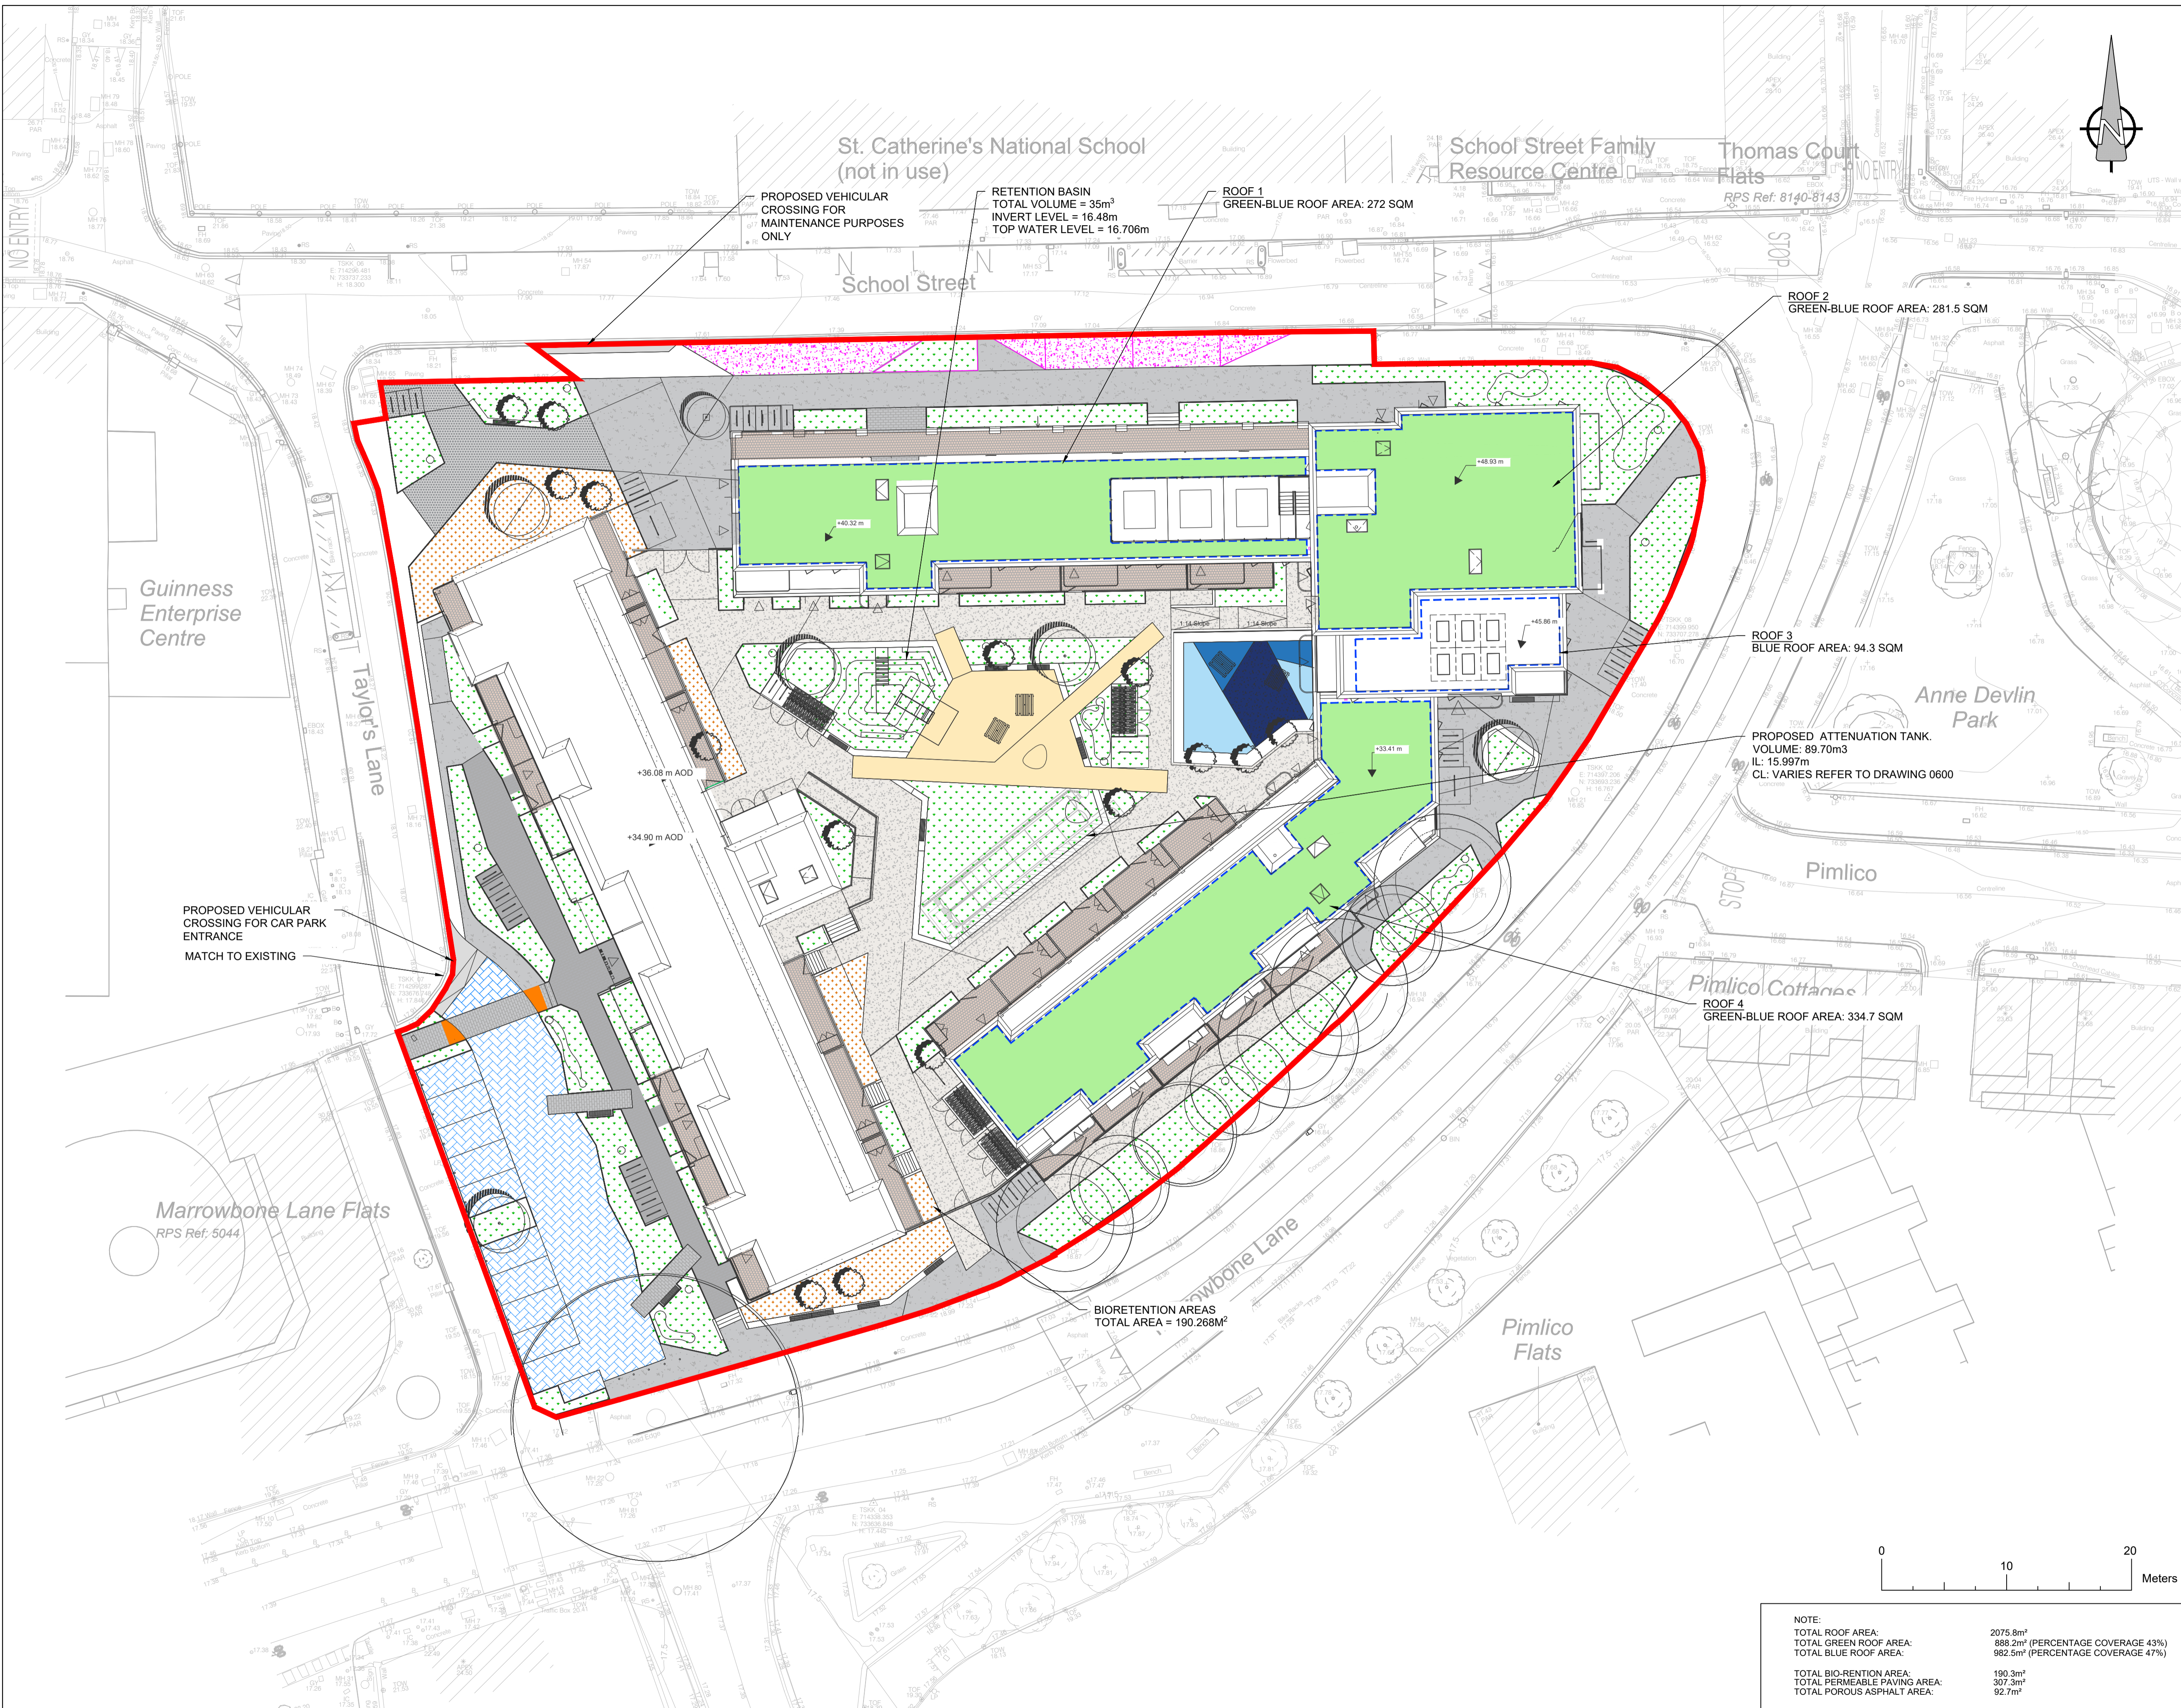

NOTE:

TOTAL ROOF AREA:	2075.8m ²
TOTAL GREEN ROOF AREA:	888.2m ² (PERCENTAGE COVERAGE 43%)
TOTAL BLUE ROOF AREA:	982.9m ² (PERCENTAGE COVERAGE 47%)
TOTAL BIO-RETENTION AREA:	190.3m ²
TOTAL PERMEABLE PAVING AREA:	307.3m ²
TOTAL POROUS ASPHALT AREA:	92.7m ²

